
PRODUCT DATASHEET

Drum and Barrel Pumps

Decanting from 50 to 205 L drums



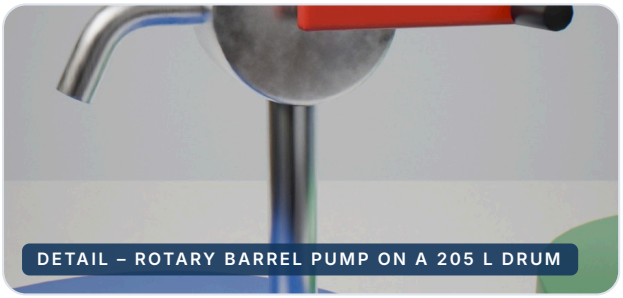

DETAIL – ROTARY BARREL PUMP ON A 205 L DRUM

OVERVIEW

The Tech Inc. Drum and Barrel Pumps decant oil from 50 to 205 L drums into transfer containers or straight into machines, without tipping drums or pouring through open funnels. Each pump fits a standard 2-inch bung and is matched to the oil it will handle.

MODELS AND CONFIGURATIONS

- **Rotary pump** – continuous flow for light and medium oils.
- **Lever-action pump** – for heavier oils and fuels.
- **Air-operated drum pump** – on request, for high-volume decanting.

TYPICAL DESIGN DATA

Drum size	50 to 205 L, 2-inch bung
Output	About 0.3 to 0.5 L per turn or stroke
Seals	Nitrile or Viton
Body	Aluminium or steel

APPLICATIONS

Lube rooms, workshops, mines, plants and vessels where oil arrives in drums.

KEY ADVANTAGES

- **No tipping** – safe decanting without lifting drums
- **Clean oil** – sealed pump and breather on the drum
- **Matched to the oil** – seals and body chosen for each lubricant
- **Fits our system** – fills our transfer containers directly

Designed and built by Tech Inc. · **Part of the Davey Group since 1990**

Offices: Chennai · Toronto · Tallinn · Al Khobar

mail@techincresearch.com · +1 (289) 622-1032 · www.techincresearch.com

Disclaimer: All products, designs and content are the property of Tech Inc. Tech Inc. reserves the right to change specifications and details without notice. Images are for representation only; the supplied equipment may differ in appearance. Data are typical; final design to client specification.